


H-MD-40-921-960

40-channel DWDM Mux/Demux with Monitor ports

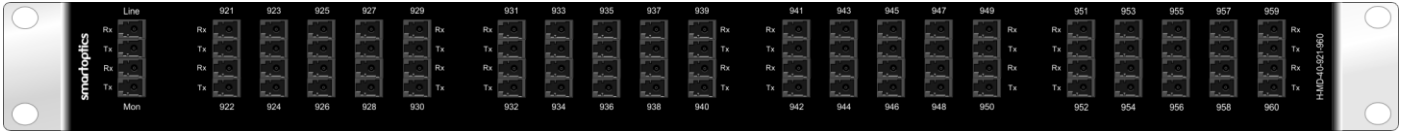


OVERVIEW

The H-MD-40-921-960 filter is a 40-channel DWDM protocol transparent Mux/Demux unit in accordance with the ITU-T G.694.1 100GHz grid. The channels operate in the standard C-band in dual fiber working configuration. The H-MD-40-921-960 has two Monitor ports that tap off 1% of the transmitted and received line signal. This provides the ability to monitor the channel power levels via a connected Optical Channel Monitoring (OCM) device or an optical spectrum analyzer.


The H-MD-40-921-960 is based on athermal AWG technology and is totally passive. This technology is restricted to -5 to +65°C operating temperature.

FUNCTIONAL OVERVIEW AND PORT DESCRIPTION

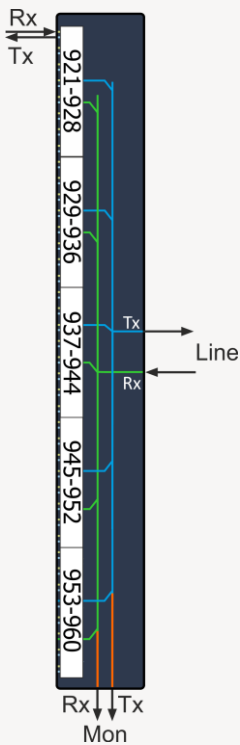


Client and Line signals entering the filter is denoted "Rx".
Client and Line signals exiting the filter is denoted "Tx".

The monitor ports tap off 1% (18 - 22dB) of the line signal.
The monitor port from transmitted line signal is denoted "Tx".
The monitor port from received line signal is denoted "Rx".

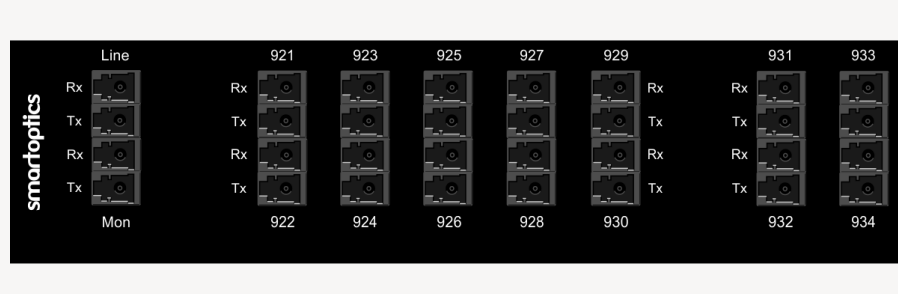

TECHNICAL SPECIFICATIONS

Parameter	
Channels	192.1 to 196.0 THz
Channel spacing	100GHz ± 33GHz (ITU)
Channel passband 1.5dB	60GHz
Channel passband 3.0dB	80GHz
Insertion loss, per channel (ch Rx ⇒ Line Tx)	Typical 5.4dB Max 5.9 dB
Insertion loss, monitor	18dB to 22dB
Isolation, adjacent channel ¹⁾	Min 8dB
Isolation, non-adjacent channel ²⁾	Min 5dB
Ripple, passband	Max 1.0dB
Return loss	Min 40dB
Chromatic dispersion	Min -20ps/nm Max 20ps/nm
Polarization mode dispersion	Max 0.70ps
Connector type	LC/UPC
Dimensions	1RU height, 19" rack mount
Operating temperature	-5 to + 65 °C
Storage temperature	-40 to + 85 °C
Max optical power	Max 24dBm (251mW)

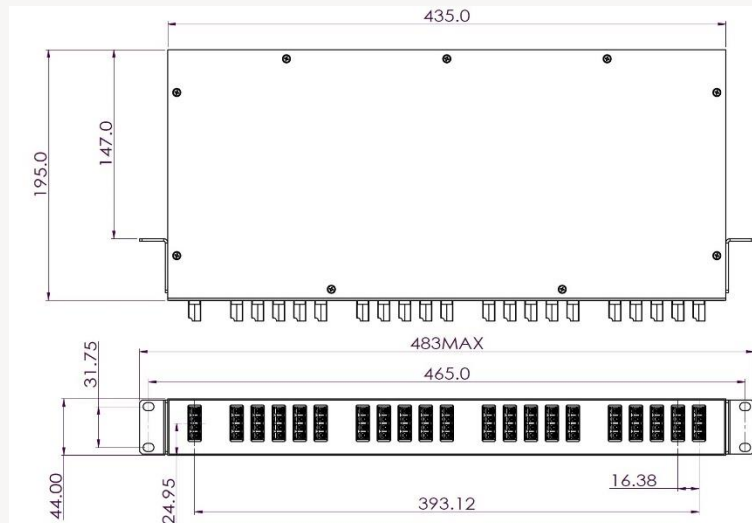

1) Maximum insertion loss difference from the mean transmission at the ITU grid wavelength to the highest power, all polarizations, within the ITU band of the two adjacent channels.

2) Total cumulative insertion loss difference from the mean transmission at the ITU grid wavelength to the highest power, all polarizations, within the ITU band of all other channels, including adjacent channels.

ORDER INFORMATION

Part number	Description
H-MD-40-921-960	H-Series: 1RU 19", 40ch DWDM Mux/Demux + Mon-port, 192.1 to 196.0THz, Link-loss channel=11.8dB, Insertion-loss channel=5.9dB, LC/UPC

Smartoptics makes no warranties or representations, expressed or implied, of any kind relative to the information or any portion thereof contained in this document or its adaptation or use, and assumes no responsibility or liability of any kind, including, but not limited to, indirect, special, consequential or incidental damages, for any errors or inaccuracies contained in the information or arising from the adaptation or use of the information or any portion thereof. The information in this document is subject to change without notice.

Subject to change without notice.

For more information visit smartoptics.com.