



H-MD-8OWDM-284-298

8ch OWDM Mux/Demux + Mon, 284-298THz

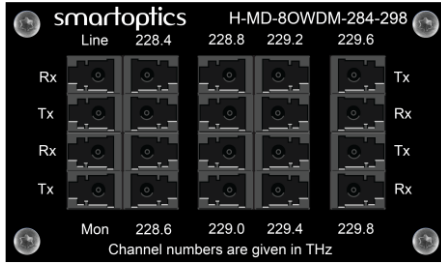



OVERVIEW

The H-MD-8OWDM-284-298 is a 8ch O-Band DWDM Mux/DeMux. The eight wavelength ports of the H-MD-8OWDM-284-289 covers eight O-Band DWDM channels spaced with 200Ghz; 228.4, 228.6, 228.8, 229.0, 229.2, 229.4, 229.6, 229.8THz.

The filter is intended to operate with the 100GbE O-Band QSFP28 transceivers: TQ2026-OxxC-SO.

The H-Series supports the industrial temperature range of -40°C to +85°C (-40°F to +185°F) which gives an extended application range into sites without temperature control. The H-Series filters are mounted in a 1 RU mounting bracket solution, and the filter module sizes vary depending on type of filter.

FILTER OVERVIEW AND PORT ALLOCATION

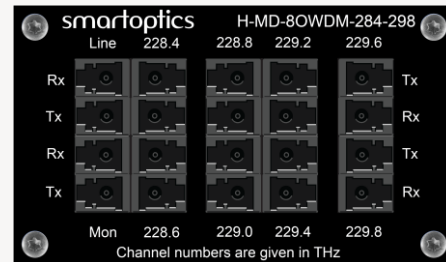


Line Rx	228.4 Tx	228.8 Rx	229.2 Tx	229.6 Tx
Line Tx	228.4 Rx	228.8 Tx	229.2 Rx	229.6 Rx
Mon Rx	228.6 Tx	229.0 Rx	229.4 Tx	229.8 Tx
Mon Tx	228.6 Rx	229.0 Tx	229.4 Rx	229.8 Rx

Note the column dependent location of Tx and Rx ports.


TECHNICAL SPECIFICATIONS

Parameter	C-temp conditions	I-temp conditions
Channels	228.4, 228.6, 228.8, 229.0, 229.2, 229.4, 229.6, 229.8	
Channel spacing	200GHz	
Channel passband	ITU ± 0.2nm	
Insertion loss, per channel (A)	Max 3.0dB	Max 3.5dB
Link loss, per channel (B)	Max 4.6dB	Max 5.2dB
Monitor port	Max 22dB	
Isolation, adjacent channel	Min 25dB	
Isolation, non-adjacent channel	Min 45dB	
Ripple, passband	Max 0.5dB	
Directivity	Min 50dB	
Return loss	Min 45dB	
Polarization dependant loss	Max 0.2dB	
Polarization mode dispersion	Max 0.20ps	
Optical power	Max 500mW	
Operating temperature	-40°C to +85°C	
Storage temperature	-40°C to +85°C	
Connector type	LC/UPC	
Module width	75 mm	

Note! A typical loss value is to be seen as a value that ~90% of a population has at beginning of life and at room temperature. The max value is the guaranteed worst-case value over time and over temperature.

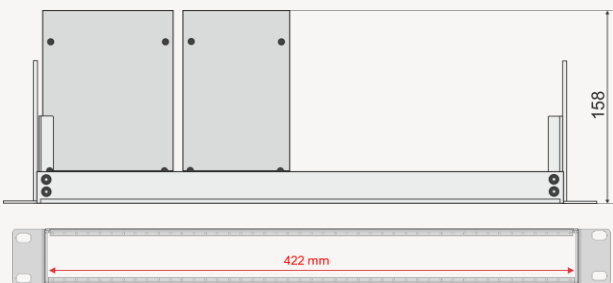

Mounting bracket dimensions with two example filters.

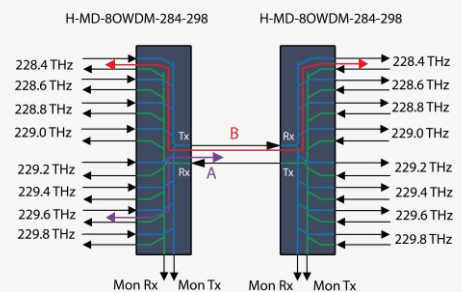

ORDER INFORMATION

The table below shows the part number and a short description.

Part number	Description
H-MD-8OWDM-284-298	H-Series: 8ch OBand WDM Mux/Demux 228.4, 228.6, 228.8, 229.0, 229.2, 229.4, 229.6, 229.8THz, Mon, 75mm, LC/UPC

Smartoptics makes no warranties or representations, expressed or implied, of any kind relative to the information or any portion thereof contained in this document or its adaptation or use, and assumes no responsibility or liability of any kind, including, but not limited to, indirect, special, consequential or incidental damages, for any errors or inaccuracies contained in the information or arising from the adaptation or use of the information or any portion thereof. The information in this document is subject to change without notice.